



photo: DUN600L

Optimum blade shape for smooth cutting


DUN500W / DUN600L



Sharp edge blades:
Upper blade...curving downward
Lower blade...curving upward

Contact point is only both tips.


Twigs are caught easily
and held firmly

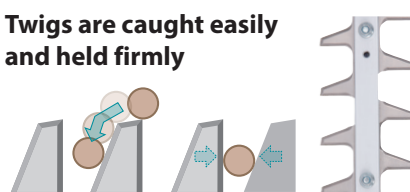



Angle adjustable hedge trimmer head

DUN500W / DUN501W

- 45° tilt-up to 70° tilt-down from the horizontal position.
- 6 angle settings (45°, 22.5°, 0°, -22.5°, -45°, -70°)



Can be folded in the 180° position for easy transport and storage: Built-in clutch works to stop the blade motion even if the throttle lever is touched during folding operation.

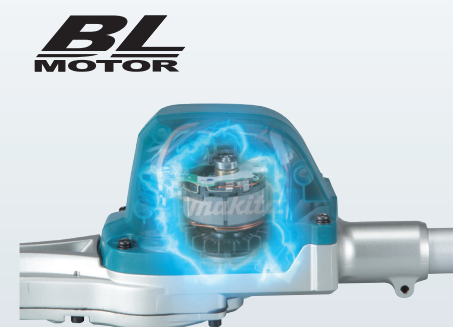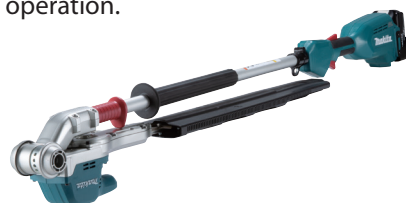

DUN500W / DUN501W

Blade Length: 500 mm (19-3/4")

DUN500W

DUN501W

DUN600L / DUN601L

Blade Length: 600 mm (23-5/8")

DUN600L

DUN601L

Shoulder harness
can be attached

2 grips

The angle of hedge
trimmer head can be
changed simply by
operating a lever.

2,115 mm

Loop handle

Non-angle adjustable
hedge trimmer head

2,050 mm

End guard (Blade tip guard)
protects blade from unnecessary wear.

Light weight

3.9 kg

Batteries: BL1815N (1.5Ah)
Model: DUN500W / DUN501W

XPT

3-speed settings by pressing the button

for optimum speed control


- High: 0-4,400 SPM
- Medium: 0-3,600 SPM
- Low: 0-2,000 SPM

Main power
switch




Reverse rotation system

for freeing the blade when it is jammed by thick branches.

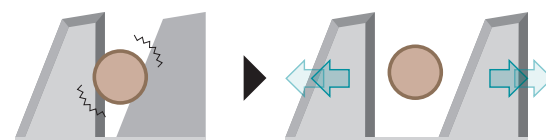

DUN500W / DUN600L


Sharp edge Blade

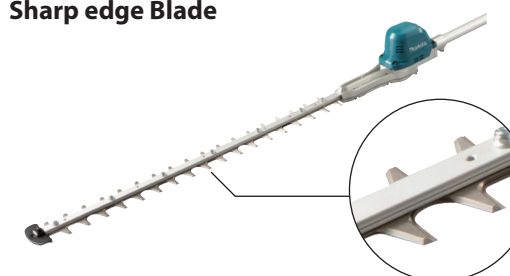

Maximum branch
diameter
23.5mm

DUN501W / DUN601L

Standard Blade

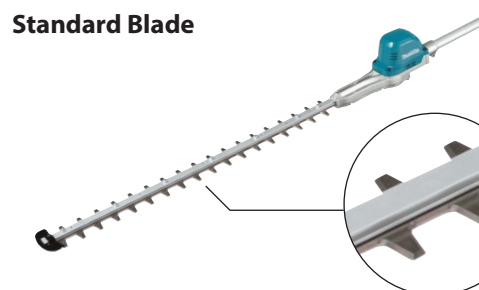

Maximum branch
diameter
21.5mm