



Makita[®]


Circular Saw
HS7601 190mm

Satisfy Professional's Needs


Compact and lightweight

1,200W

Continuous rating input

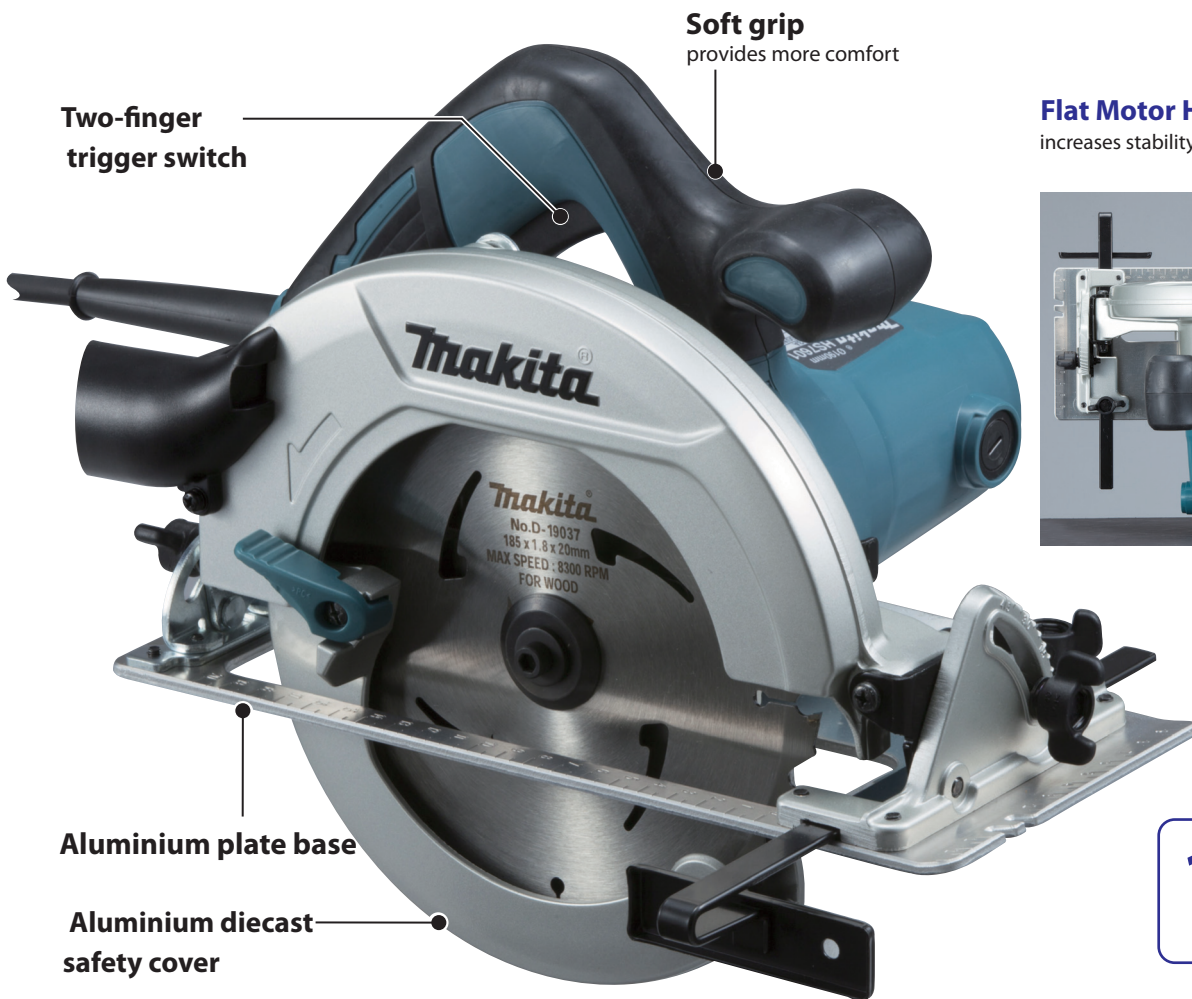

Flat Motor Housing Design
increases stability when changing blades.

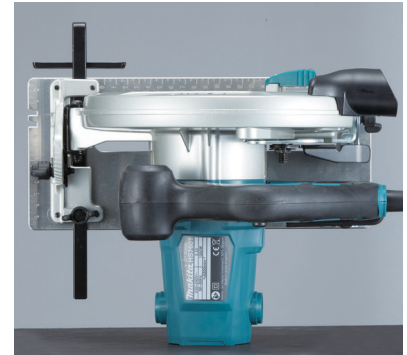

1,200W
Continuous rating input

Rear dust exhaust port

exhausts sawdust backward only, preventing it from scattering around to provide comfortable operation.



Dust nozzle can be attached for use with a vacuum cleaner.

Single action lever

for quick adjustment of cutting depth



Rear angular guide

For smooth and precise adjustment of bevel angle

Compatible with Guide rail

For use with Guide rail, the shape of base is designed to install Guide rail adapter.



Optional Guide rail adapter
Part No. 197005-0

Rear angular guide

Compact and lightweight

Much more compact and lightweight than predecessor model

Model No.	Overall length (mm)	Net weight (kg)
HS7601	309	4.0
Predecessor Model	345	4.9

Circular Saw

HS7601 190mm

303 mm

- Double Insulation
- Dust Collecting

Continuous rating Input	1,200W
Max cutting capacity	at 0 degrees : 66mm at 45 degrees : 46mm
Blade diameter	190mm
No load speed (r/min)	5,200
Dimensions (LxWxH)	309x232x255
Net weight	4.0kg
Power supply cord	2.5m

Standard Equipment :

TCT saw blade, Hex wrench, Guide rule (Rip fence), Dust nozzle

weight according to EPTA-Procedure 01/2003
Items of standard equipment and specifications may vary by country or area.