

Can be attached with a vacuum cleaner.



Guide Rule (Sub Base) (option)

Guide Rule can be used as Sub Base by turning up side down.


Powered by two 18V Li-ion batteries in series



Variable speed control by dial



On-tool storage for hex wrench



Battery capacity warning lamp

Accessories

T.C.T Saw Blade




- Make big reducing stress of cutting
- Tip's shape of New type



No. of Teeth	Plate (mm)	Kerf (mm)	Rake (degree)	WOOD	MDF	Laminate	Aluminum	CORIAN	Part No.
56	1.0	1.45	23°	✓	✓	✓			EFFICUT B-57364
55	1.1	1.6	20°	✓	✓				B-57059
28	1.4	2.0	15°	✓					B-56649
28	1.6	2.2	15°	✓					B-07434
48	1.25	1.85	8°	✓					B-56166
48	1.6	2.2	8°	✓					B-07353
60	1.4	2.0	5°		✓	✓			B-56661
60	1.4	2.0	5°		✓	✓			B-56677
56	1.4	2.0	-3°				✓		B-56655
56	1.7	2.4	-3°				✓		B-07440
48	1.4	2.0	5°					✓	B-56683
48	1.7	2.4	5°					✓	B-10344

Guide Rail

Length	Part No.
1,400mm	194368-5
1,900mm	194925-9
3,000mm	194367-7

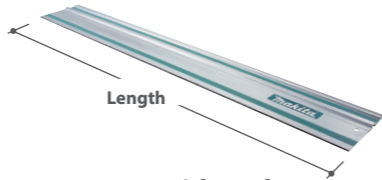

Bevel Guide Set

Adjustable angle of Guide Rail
Part No. 194433-0



Guide Rule (Sub Base)

Part No. 165447-6



Clamp Set

(use with Guide rail)
Part No. 194385-5



Dust bag

Part No. 126599-8



Cordless Plunge Cut Saw

DSP600 165 mm

Variable Speed	Blade Diameter	165 mm (6-1/2")
Brake	Max Cutting Capacity	90°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38mm (1-1/2")
Soft Start	No Load Speed (RPM)	2,500 - 6,300
Dust Collection	Vibration Level	2.5 m/s ² or less
Carrying Case	Sound Pressure Level	92 dB(A)
	Sound Power Level	103 dB(A)
	Dimensions (L x W x H)	346x241x272mm (13-5/8"x9-1/2"x10-3/4")
	Net weight	4.4 - 5.1 kg (9.8 - 11.2 lbs.)

Standard Equipment : TCT Saw Blade, Hex Wrench

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.



Cordless Plunge Cut Saw
DSP600ZJ 165 mm

Satisfy Professional's Needs



Up to 40% Faster Cutting
than corded current model

Two 18V LXT Li-Ion batteries
deliver the power and performance



As powerful as AC model thanks to BL motor



High power for fast cutting and ripping

- 18V X2 Li-ion battery
- Brushless DC motor
- New thin saw blade




**BL
MOTOR**

ADT

Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

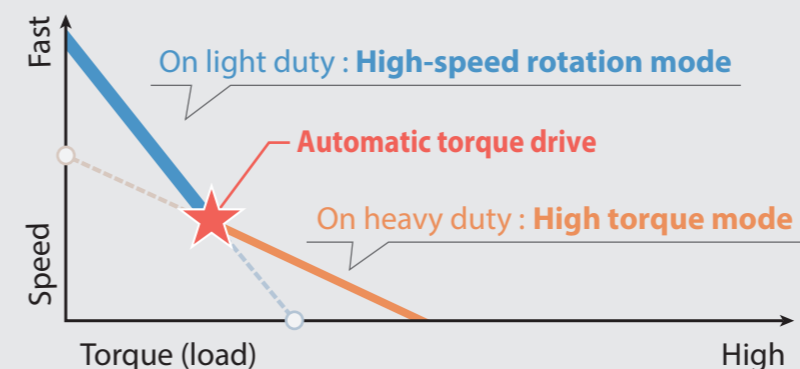

High Maneuverability




Now Free from Cord

Tip-Resistant Design



Sliding the lever prevents this tool from falling down towards blade case

Bevel Cut

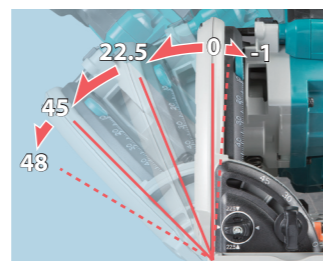

Bevel Range
:: -1 to 48 degrees

Precision Bevel Cut

The position of cutting line is always the same regardless of bevel angle in cutting with Guide Rail attached.

Positive Stopper



Positive stopper 22.5



Lever for positive stopper 45-48

Lever for bevel angle -1

Depth Stopper for Splinter-free Cutting

Enables to easily cut a preliminary groove at a depth of 2mm (1/16") for splinter-free cuts.



Depth Stopper



Unclean Cutting



Splinter-free Cutting

Close-to-Wall Cutting



Only 18mm (11/16") away from wall at minimum

Soft start

minimizes start-up shock, and makes the tool start smoothly.

Electric brake

enables you to start next operation quickly.

