



Chain Saw
UC4041A 400mm



Tool-less saw chain/
tension adjustment

New adjustment lever for easier tool-less saw chain/ tension adjustment



Easy-to-grip Front loop handle

The whole shape is firmly held, especially when the machine is tilted sideways.



1. extendable to allow for:

- Easier saw chain tightening
- Higher tightening torque

2. can be quickly retracted at any angle.

3. reduces the projections on Sprocket cover.




Improved oil pump

keeps the delivery of chain oil constant regardless of temperature and the oil viscosity.



Large view window of Oil tank
allows operator to easily check oil level.

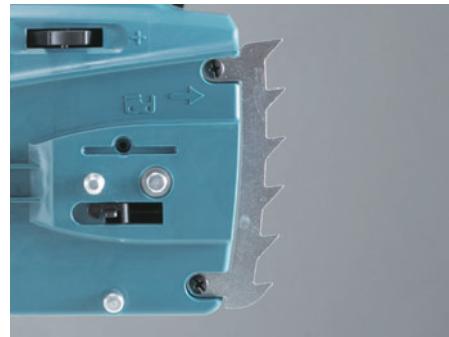

Large separate-type metal spike bumper

An optimum design has been achieved by employing separate-type. The spike grips workpiece firmly to provide more control.

Chain Saw

UC4041A 400mm

132

- Double Insulation
- Brake
- Automatic Oiling
- Chain Brake



Dimensions :
excluding blade and guide bar

Continuous rating input	1,800W
Chain speed per minute	870m/min
Guide bar length	400mm
Chain blade	Pitch: 3/8" Gauge: 0.043" / 0.050"
Dimensions (L x W x H)	455x245x200mm
Net Weight*	4.7kg / 4.8kg
Power supply cord	0.3m

Standard Equipment :
Chain Blade, Guide Bar Cover, Hook Complete

* weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.



Environmentally Friendly